



Fabric Postcards

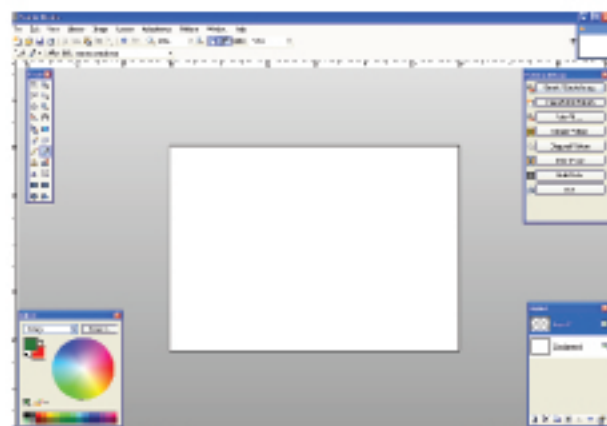

Pick the size of your Postcard. I used 6" by 4". Go to File/New/Click on Custom. You will now need to change the Resolution to 300, enter 6.0 in Width, and 4.0 in Height, and click okay. Your new Template will appear on your workspace.

If you are having trouble seeing the screen, go to Window and using the drop down box, change Window size to 33%.

You are now ready to select any image to Auto Fill the front of your Postcard. If you wish to use the colorations we have given, then go to Auto Fill/Browse From Library Image. Click on the image you wish to use, and then click on Open. Your image will

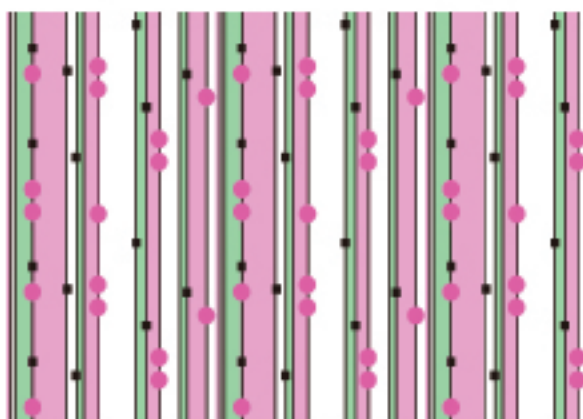


automatically tile your template.

If you wish to change the color or texture of an image, first open the image, change your coloration, and re-save the image as a .png file in your folder on your computer. Do not save the image in the sample library; instead, save it to a new folder on your computer.

Now use Auto Fill, and select the new image from your computer, and your image will automatically tile your template.

Once you are satisfied with the front of the Postcard, repeat the save process with the back(File/New/Click on Custom).

Again use one of our images to Auto Fill area, or create a new image through coloration or texture.

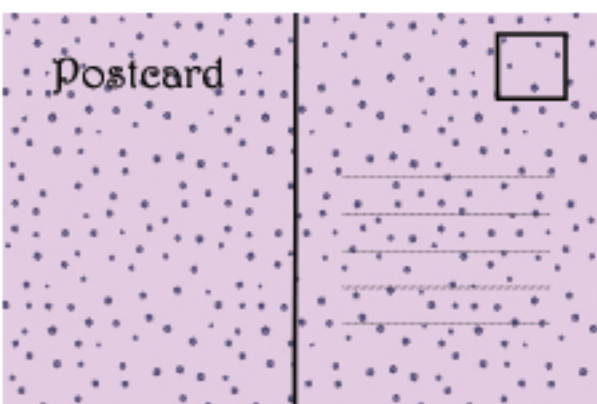

Using the Text Tool (A), pick your Font and add the word Postcard. You can also use your dash line to create lines for address. I used the Rectangle Tool for the Postage Stamp, and used the Line/Curve Tool to create the line down the center.

Don't forget to add a New Layer each time you add a new element.


Complete your Postcard using the accompanying instructions.

Postcard Filler

1.) Cut the Pellon® Peltex®72 in 6" wide strip.

2.) Cross cut the strip every 4 1/4".




4 1/4"

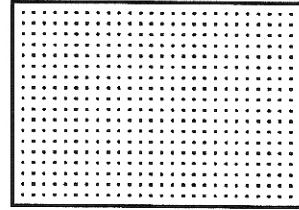

6"





Construction of Postcard

1.) Layer Postcard sandwich. Solid piece of fabric (where message and address is to be written) good side down plus Pellon® Peltex®72 plus pieced postcard - good side up. Follow the directions on the Pellon® Peltex®72 information sheet. Set with an iron. **Protect your iron and ironing board with a pressing cloth on the bottom and top of the postcard layers. You want to keep the adhesive away from the hot iron. If you find any of your edges are uneven do any final trimming after the layers are ironed together.

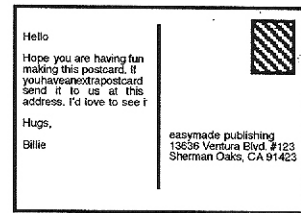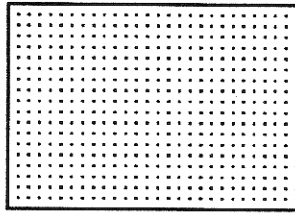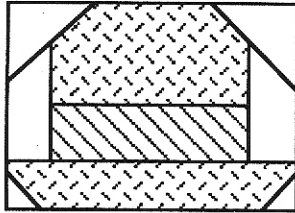

2.) Use a sewing machine to ZigZag, Blanket Stitch or anything that would give you a nice clean edge around the outside edge of your postcard.

Swing the needle to the right. Place the edge of the postcard under the sewing machine foot so that the needle will land just off of the card. The stitch width must come on to the postcard about an 1/8" to 1/4".

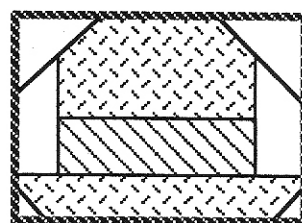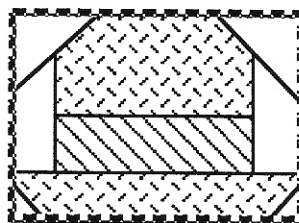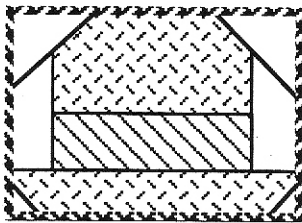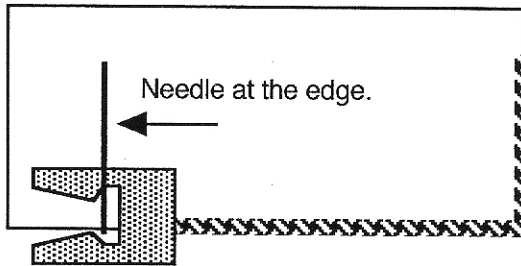

3.) Write your message and address the card.

4.) Place on a postage stamp. (2006 the US Postage Stamp price is 39 cents.) The self adhesive are the best stamps to use. Be sure to rub the stamp down securely with your thumb or a spoon.

NOTE: Postcards Minimum Size: 5 1/2" x 3"
 Maximum Size: 6" x 4 1/4"
 Anything larger • Consult Postmaster